

# UGDE0600A5ARB KC643M

Produktnummer: 4124325

Harvi II Long. UGDE. 3xD. Length of Cut.


- For finishing and semi-finishing applications.
- Unequal flute spacing minimizes chatter for smoother machining.
- Non-center cutting.
- Kennametal standard dimensions.



## Spesifikasjoner

|                    |               |
|--------------------|---------------|
| Vekt               | 0.028 kg      |
| Bredde/tykkelse    | 0.0 mm        |
| Høyde              | 0.0 mm        |
| Volum              | 0.02 liter    |
| Dimensjon          | 0.0           |
| Nøkkelvidde        | 0.0 mm        |
| Form               | RADIE         |
| kW                 | 0.0           |
| Tanning            | 5             |
| Innvendig diameter | 0.0 mm        |
| Utvendig diameter  | 0.0 mm        |
| Type               | STANDARD FRES |
| Type 4             | 0.0           |
| Lengde X dia       | 3XD           |
| Delelengde         | 0.0 mm        |
| Type 3             | 0.0           |
| Serie              | HARVI II      |
| Kvalitet           | KC643M        |
| Bredde ytre ring   | 0.0 mm        |

|                                 |   |
|---------------------------------|---|
| Bredde indre ring               | 0.0 mm  |
| Type 2                          | 0.0   |
| Type 5                          | 0.0   |
| Bordiameter                     | 0.0 mm  |
| Diameter                        | 6.0 mm  |
| Neseradius                      | 0.5 mm  |
| Arbeidsmateriale                | Stål, Rustfritt stål, Støpejern, Superlegering, Herdet stål |
| Antall tenner/rader/deling/spor | 5   |
| Lengde                          | 18.0 mm   |

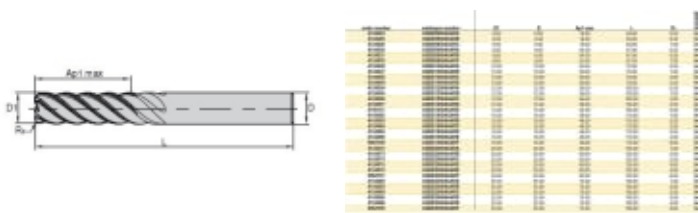

Les mer om produktet her:

<https://www.ail.no/product?number=4124325>